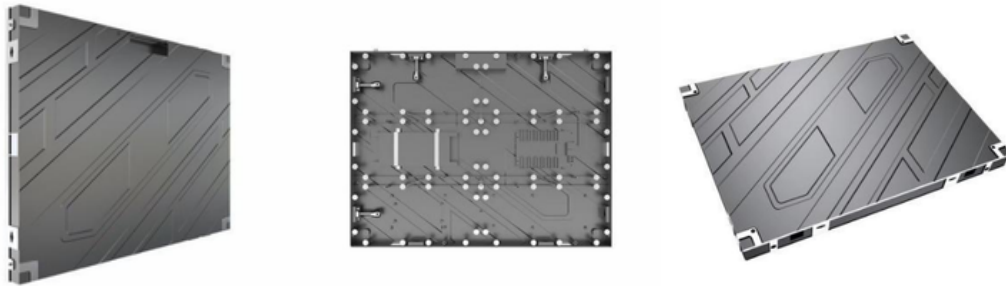

Advertising Machine Series - Vertical

Indoor ultra-thin front maintenance LED display unit



1.Product features:

1. With a thickness of 58mm, it adopts an ultra-thin and lightweight design.
2. Front and rear installation, full front maintenance.
3. GOB coating process, anti-collision.
4. Mobile, easy to operate, supports APP remote control, USB, Ethernet cable, optional 4G



Optional specifications: 640mm*1920mm or 960mm*1920mm

2.Main Technical Specifications

| Parameter | Value | | | | | |
|--------------------------------|-------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| | P1.25 SMD1010 | P1.53 | P1.86 SMD1515 | P2.0 SMD1515 | P2.5 SMD2020 | P3 SMD2020 |
| Pixel Pitch | 1.25mm | SMD1212 | | | | 3.07mm |
| Package mode | 256x128 | 1.53mm | 1.86mm | 2.0mm | 2.5mm | 104x52 |
| Pixel pitch | 640000/m ² | 208x104 | 172x86 | 160x80 | 128x64 | 105625/m ² |
| Pixels Per Module | 512x1536 | 422753/m ² | 289444/m ² | 250000/m ² | 160000/m ² | 208x624 |
| Pixel Density | | 416x1248 | 344x1032 | 320x960 | 256x768 | |
| Full screen resolution | 320mm*160mm | | | | | |
| Module Size | 640mm*1920mm*58mm | | | | | |
| Panel Size | 1R1G1B | | | | | |
| Pixel configuration | Front | | | | | |
| Maintenance | HUB75E | | | | | |
| Port type | 0°~+7° (Concave) | | | | | |
| Curve | ≤0.15mm | | | | | |
| Planeness | Die-casting aluminum | | | | | |
| Material | Support brightness and chroma | | | | | |
| Calibration | 2M~15M | | | | | |
| Best viewing distance | 160°(W) 120°(H) | | | | | |
| Best viewing angle | 180W/panel | | | | | |
| Input Power <Max> | 800W/panel | | | | | |
| Input Power <Typical> | AC : 100~240 V | | | | | |
| Input Voltage | 14bit | | | | | |
| Processing Depth | 3840 Hz | | | | | |
| Refresh Rate | 50/60Hz | | | | | |
| Video Frame Rate | 100,000 Hours | | | | | |
| LED Life Time | 52kg/panel | | | | | |
| Weight | IP43 | | | | | |
| Ingress Protection | 900cd/m ² | | | | | |
| Brightness | -20°C~+60°C/ 10~85% RH | | | | | |
| Storage Temperature/Humidity | -10°C~+40°C/ 10~80% RH | | | | | |
| Operating Temperature/Humidity | | | | | | |